



ADA-QFN28


Introduction:

This adapter connect the pins of a DFN28 or QFN28 package chip to a 28 pin DIP equivalent.
It accept a MLF/QFN device and plug into a DIP socket.
Socket type "cover".


Connections of this adapter:

DIP28	QFN28	QFN28	DIP28
1	26	25	28
2	27	24	27
3	28	23	26
4	1	22	25
5	2	21	24
6	3	20	23
7	4	19	22
8	5	18	21
9	6	17	20
10	7	16	19
11	8	15	18
12	9	14	17
13	10	13	16
14	11	12	15

Package MLF/QFN:



Dimensions of the devices accepted:

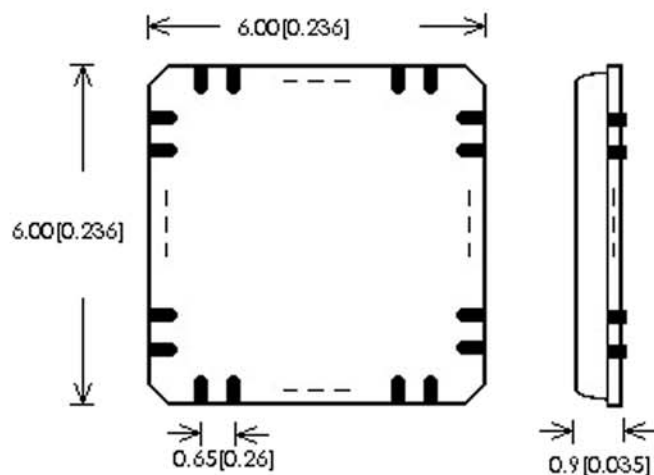

Examples of supported devices:

MICROCHIP : dsPIC30F1010, PIC18F25K22

Equivalent adapters from other manufacturers:

WL-QFN28-U203
PA28-QFN28D
SA0685

Item includes:

Adapter.
User manual in English and French.