



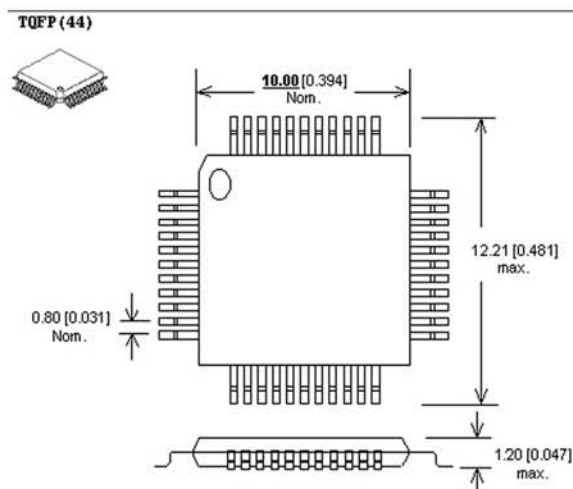
ADA-TQFP44

Introduction:

This adapter connect the pins of a 44pin TQFP device to a 48 pin DIP equivalent. It accept a TQFP44 device and plug into a DIP socket. You can use it for EPROMs, microcontrollers.
Socket type "open".

Connections of this adapter:

DIP44	TQFP44	TQFP44	DIP44
1	39	38	44
2	40	37	43
3	41	36	42
4	42	35	41
5	43	34	40
6	44	33	39
7	1	32	38
8	2	31	37
9	3	30	36
10	4	29	35
11	5	28	34
12	6	27	33
13	7	26	32
14	8	25	31
15	9	24	30
16	10	23	29
17	11	22	28
18	12	21	27
19	13	20	26
20	14	19	25
21	15	18	24
22	16	17	23

Package TQFP44:**Dimensions of the devices accepted:****Examples of supported devices:**

MICROCHIP PIC16F877
ATMEL AT89C52

Equivalent adapters from other manufacturers:

WL-QFP44-U002
PA44QF44D / CA44TQ44D-EO
SA245A

Item includes:

Adapter.
User manual in English and French.